



D400

For 4 single or 2 double racks

Key benefits



Danish design
Timeless and elegant design in brushed stainless steel



Heating
Fast and efficient heating with option of both electric, oil or gas



Touch display
Simple and very user friendly. Can be changed independently from the control panel



Customized
The ovens exists in many different versions and dimensions can be customized to your needs



Handcrafted and built to last 30 years



Bakes a broad range of products with excellent results



5 years warranty

D400 Technical specifications

MATERIAL INFORMATION

- * Internal LED light
- * Front of the oven is produced in stainless steel type 304
- * Fire chamber is produced with 2 mm stainless steel type 253 MA

ELECTRIC HEATED

3 PH 220 - 240 VAC 120,0 KW
3 PH 380 - 415 VAC 120,0 KW

Recommended fuse 200

OIL/GAS HEATED

3 PH 220 - 240 VAC 133,0/5,0 KW
3 PH 380 - 415 VAC 133,0/5,0 KW

Recommended Fuse 20

TECHNICAL DATA

PROPERTY

Temperature range
Steam generation
Water connection

VALUE

50-350°C.
4,8 L./20 sec.
1/2" minimum 3 bar

Platform diameter
Max load for platform

1700 mm.
1500 kg.

Height
Height of rack
External width x depth *
External width x depth **

2450 mm.
1870 mm.
3050x2325 mm.
2250x3125 mm.

No. of racks - Tray size

4 pcs. - 460x610 mm.
2 pcs. - 600x1000 mm.


Shipping weight
Minimum entry opening:
- Delivery in 1 piece
- Delivery in 3 pieces

1500 kg.
1650x2450 mm.
840x2000 mm.

* Burning chamber on the side

** Burning chamber on rear

Technical footprint

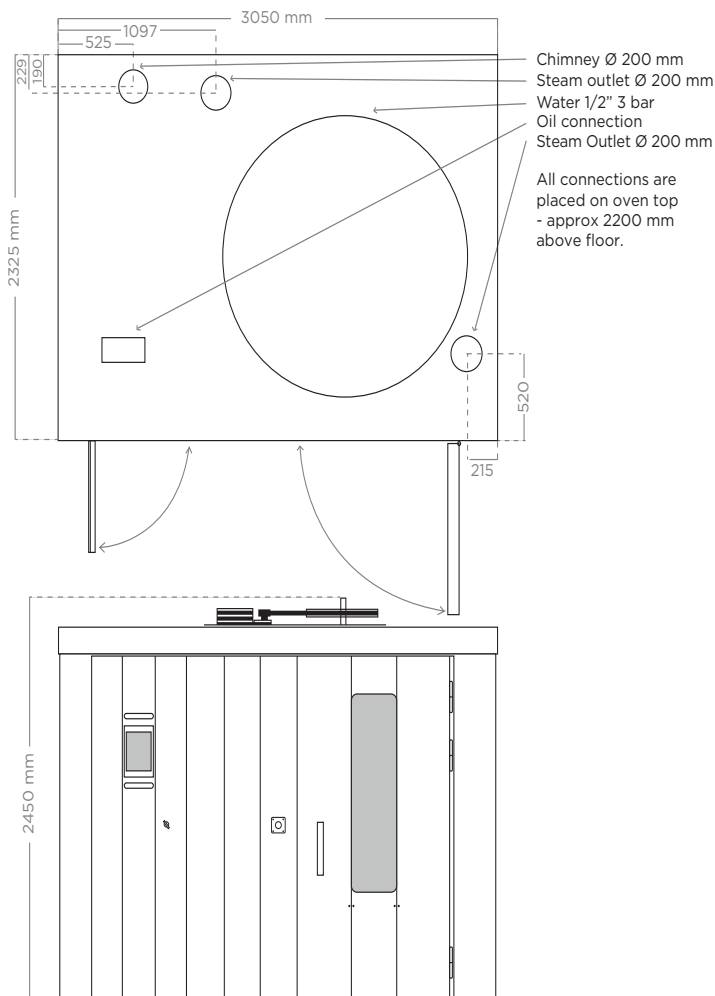

Please stay in touch

Danbake ApS
Nøgelgårdsvej 20
3540 Lynge
Denmark

Jesper Larsen
Sales Manager
jl@danbake.dk
+45 2343 8968



www.danbake.dk

VERSION F:

